



TC 7700

High Performance Cutter

Technical Specifications

Paper Specifications

Weight	70 - 200 gsm, 18.6# bond to 75# cover (above 130 gsm, or 48# cover, requires application review)	
Form width	12" max	305 mm
Form length	2" 5/6" - 24"	72 - 610 mm (over 12", or 305 mm, requires application review)
Cut strip (other options available on request)	programmable with oscillating blade cartridge - TC 7510 1/6" with vertical blade cartridge - TC 7520 7,8 mm with vertical blade cartridge - TC 7530	
Side Trimming	1"	up to 25 mm per side
Speed	99 positions	
Height level from floor	38.2" - 47.6" (TC 1005 option)	970 - 1210 mm (TC 1005 option)

Size and Weight

Length	39.4"	1000 mm
Width	26.4"	670 mm
Height	41.3"	1050 mm
Weight	551 lb	250 kg

Electrical & Environmental

Power	230V/208V, 50/60 Hz, 1.5 KVA
-------	------------------------------

Speed (cuts per hour)

CARTRIDGE	TC 7510	TC 7520	TC7530
Cut type	Single Cut	Strip Cut Single Cut	Strip Cut Single Cut
Height Form 4"	55.000	55.000	55.000
Height Form 8"	45.000	45.000	45.000
Height Form 12"	30.000	30.000	30.000

Simpla Pinless Configurations

CUTTER'S MODEL	CARTRIDGE'S TYPE			
	TC 7510	TC 7520	TC 7530	TC 7502
TC 7712	X			X
TC 7722		X		X
TC 7732			X	X



TC 7700

High Performance Cutter



DUPLA PINLESS - TC 7700

developed to link Digital Printers, Inserters,

Folders or to work "stand-alone"

- ✓ High speed, up to 30.000 cuts per hour
- ✓ Base on wheels with blocking device
- ✓ Height adjustment paper level device

Main features include:








- » Two independent Pinless paper channels to process and interleave two continuous paper form printed in 2-up slalom mode by Merger device.
- » Unique cartridge design: the cross blade cartridges and the side trimming cartridges are removable and interchangeable for quick and easy on site maintenance and for quick application changeover.
- » Vertical cross blade cartridge (2 blades system) with high precision (1/96") and high durability.
- » Vertical cross blade cartridge (3 blades system) for single stroke 1/6" strip cut.
- » Vertical cross blade cartridge (3 blades system) for single stroke 7,8 mm strip cut.

- » Paper loop interface for direct connection to laser printers by Merger device.
- » Up to 99 cutting program memory.
- » Display and keyboard for programming, information, service.

Global service and around-the-clock support help ensure our reputation as the industry's reliability leader. Our products increase productivity, cut labor and paper costs, and even make new applications possible - TecnaU solutions truly empower digital print to help you do more with less.




CONFIGURATION EXAMPLES:

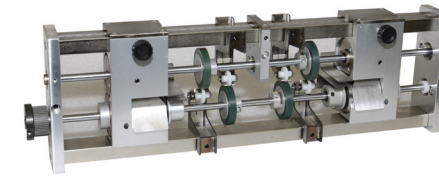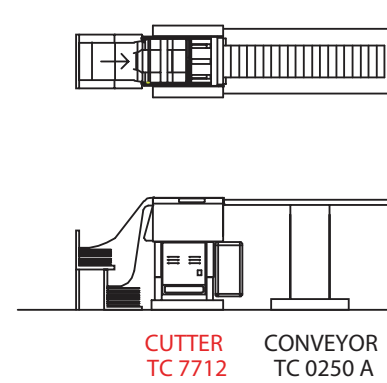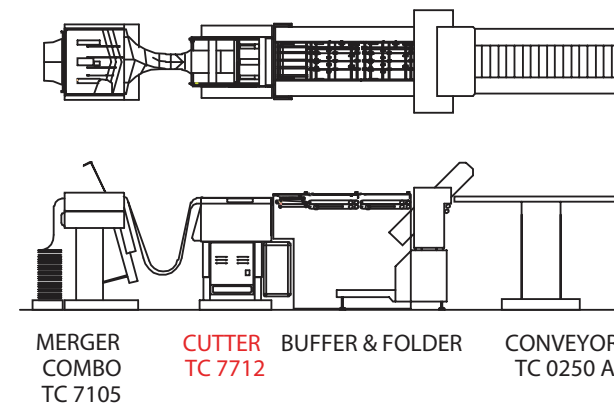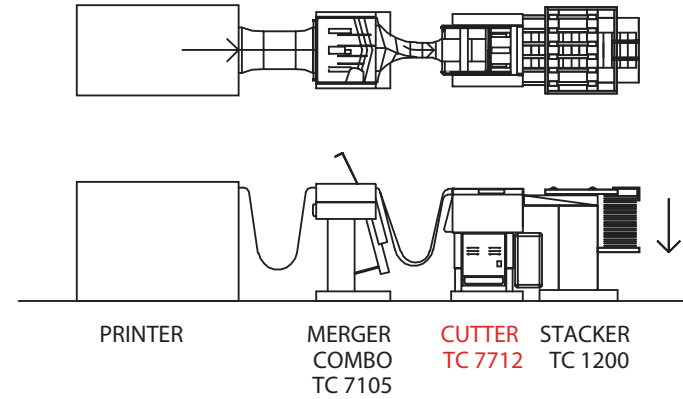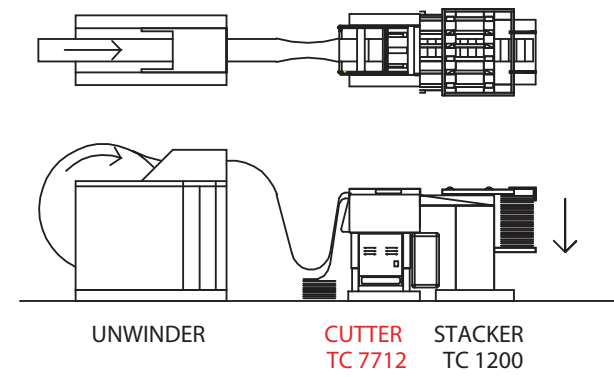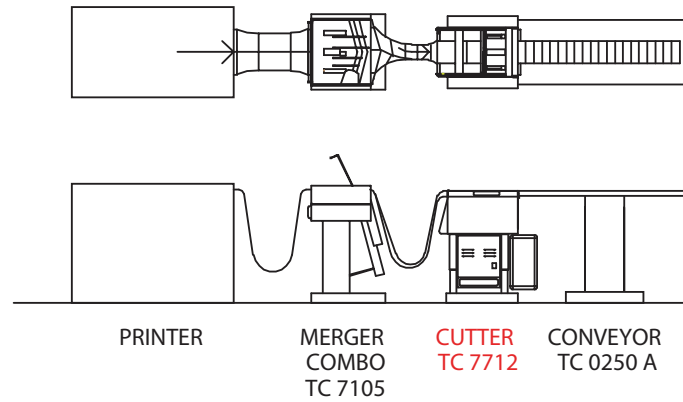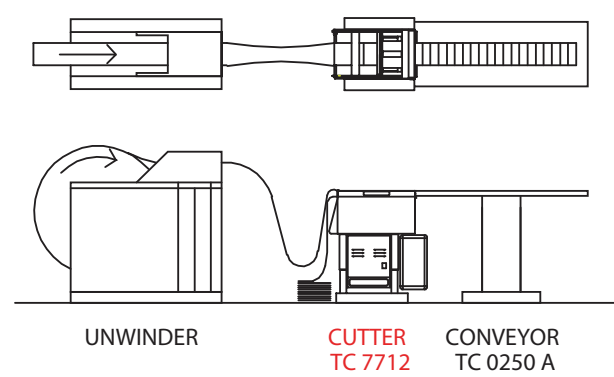


SIDE TRIMMING CARTRIDGE
TC 7702



**HARD METAL
VERTICAL BLADE CARTRIDGE**
TC 7510 (single cut)

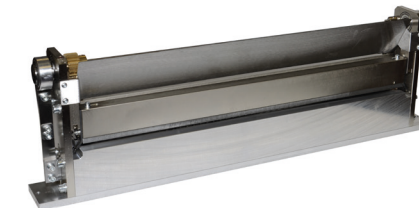

**HARD METAL
VERTICAL BLADE CARTRIDGE**
TC 7520 (strip cut 1/6")

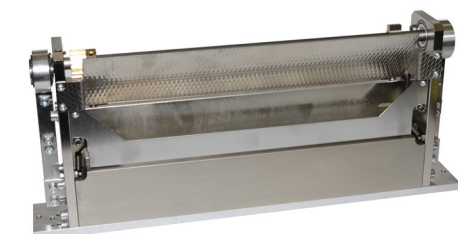

**HARD METAL
VERTICAL BLADE CARTRIDGE**
TC 7530 (strip cut 7,8 mm)

